

1800-717-218 0317-6810399 0317-6810399



亚海金通

沧州亚海金通管业有限公司
Cangzhou Ya HaiJinTong Pipe Industries Co., Ltd

沧州亚海金通管业有限公司

Cangzhou Ya HaiJinTong Pipe Industries Co., Ltd

地址: 河北省沧州市孟村县盐庄子工业园

Add: Lixuesecui Industrial Park Mengcun County


Cangzhou City Hebei Province China

电话(Tel): 0317-6810399

传真(Fax): 0317-6833399

<http://www.czpipe-fitting.com>

E-mail: czpipefitting@gmail.com

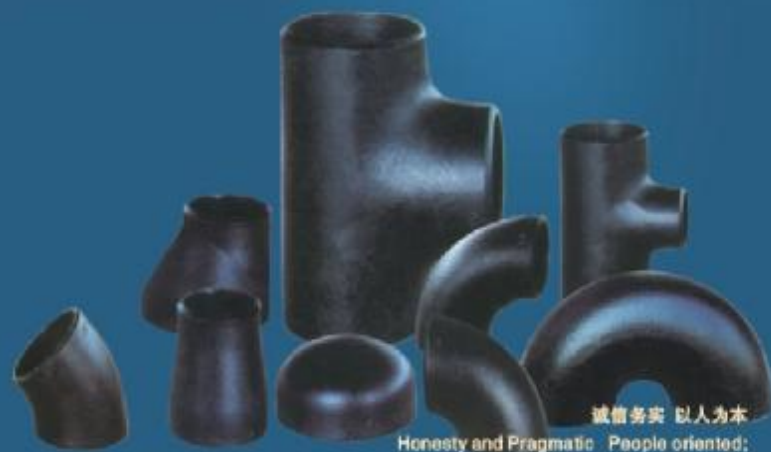

诚信务实 以人为本

Honesty and Pragmatic People oriented;

海纳百川 诚纳四海

The sea holds all the water. The honest wins the whole world.



亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD

主营产品/Main Production



1. 无缝钢管/SEAMLESS STEEL PIPE

规格/Specification:

Size OD: (6-610) Mm, Wall thickness: (0.5-20) Mm

材质/Material: 碳钢/Carbon steel

执行标准/Standard:

ASTM A106, ASTM A53, API 5L, GB8163



2. 直缝钢管/ERW STEEL PIPE/LSAW

规格/Specification:

Size OD:

ERW: (21.3-610) Mm, Wall thickness: (3.2-16) Mm

LSAW: (355-1820) Mm, Wall thickness: (5.0-50) Mm

材质/Material: 碳钢/Carbon steel

执行标准/Standard:

ASTM A53, DIN 2458, API 5L, GB/T3091, GB/T9711, BS1367



3. 管件/FITTING

规格/Specification:

Diameter: DN15-DN1800

Wall thickness: SCH10-SCH160

材质/Material:

碳钢/Carbon steel, 合金钢/Alloy Steel

执行标准/Standard:

ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.



4. 法兰/FLANGE

规格/Specification:

Diameter: DN15-DN1500

材质/Material:

碳钢/Carbon steel, 合金钢/Alloy Steel

执行标准/Standard:

ASME B 16.5, ASME B 16.47, BS4504, DIN etc.

管件生产线/Production Line

1. 对焊弯头/Butt-welding Elbow:



品名: 45度, 90度, 长/短半径弯头

Named: L/R, S/R, 45D, 90D ELBOWS

执行标准: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

Executive Standard: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

原材料/Materials:

碳钢/Carbon steel: ASTM A234 WPB, 20#, Q235

不锈钢/Stainless steel: ASTM A403 WP304/304L, WP316/316L, WP321

表面处理: 黑色或透明喷漆, 表面抛光, 根据客户要求。

Surface Treatment: black or transparent painting, grit blasting, or according to the requirement

产品应用范围: 石油, 化工, 造纸, 电力, 造船, 建筑, 钻井平台等。

Application: Petrochemical and chemical company, fertilizer industry, power plant, shipbuilding, construction, offshore platform, etc.


弯头生产线/ELBOW PRODUCTION LINE:

生产过程A为NPS 1/2"到24", 由管材推制而成, 最大承接外径820mm;

生产过程B为NPS 26"到72", 由板材焊接而成, 最大承接外径2400mm;

A: NPS 1/2"-24" 生产过程/ Production process from NPS 1/2"-to 24"

流程图/Flow chart:

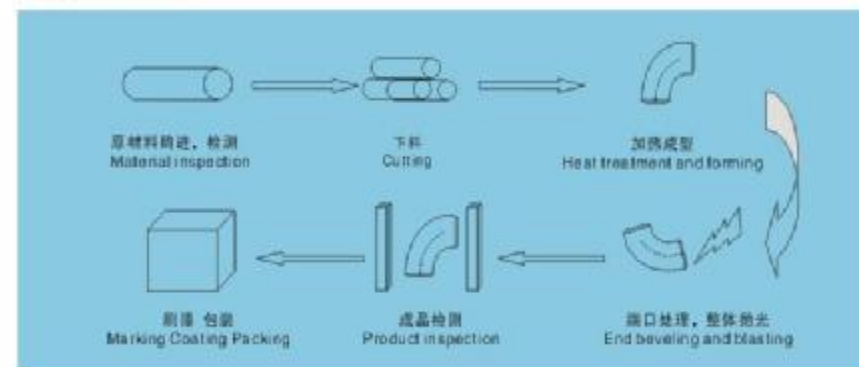



亚海金通


沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD

管件生产线/Production Line



B: NPS 26"~72"生产过程/ Production process from NPS 26" to 72":
流程图/Flow chart:

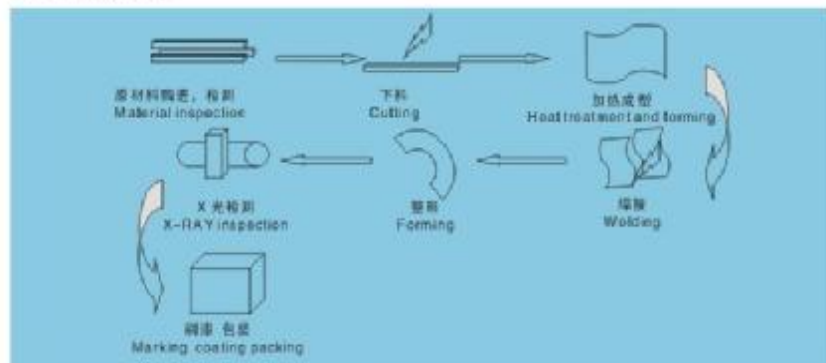



亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

管件生产线/Production Line



CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD

管件生产线/Production Line


2. 对焊三通 四通 / Butt-welding Tee, cross:




Butt Straight Tee
ASME B 16.9



Butt Reducing Tee
ASME B 16.9



Straight Cross



Reducing Cross



Outlet Tee



Outlet Cross

凡尺寸和公差要求均符合标准规定。

品名: 等径三通, 异径三通, 四通

Name: Straight Tee, Reducing Tee, Cross

执行标准: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc

Executive Standard: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

原材料/Materials:

碳钢/Carbon steel: ASTM A234 WPB, 20#, Q235

不锈钢/Stainless steel: ASTM A403 WP304/304L, WP316/316L, WP321

表面处理: 黑色或透明漆, 表面抛光, 根据客户要求。

Surface Treatment: black or transparent painting, grit blasting, or according to the requirement

产品应用范围: 石油, 化工, 造纸, 电力, 造船, 建筑, 钻井平台等。

Application: Petrochemical and chemical company, fertilizer industry, power plant, shipbuilding, construction, offshore platform, etc.


三通生产线/TEE PRODUCTION LINE:

生产过程A 为NPS 1/2"到24", 由管坯挤压而成;

生产过程B 为NPS 26"到72", 由板坯焊接而成, 最大承压外径2400mm;

A: NPS 1/2"-24"生产过程/ Production process from NPS 1/2" to 24";

流程图/Flow chart:

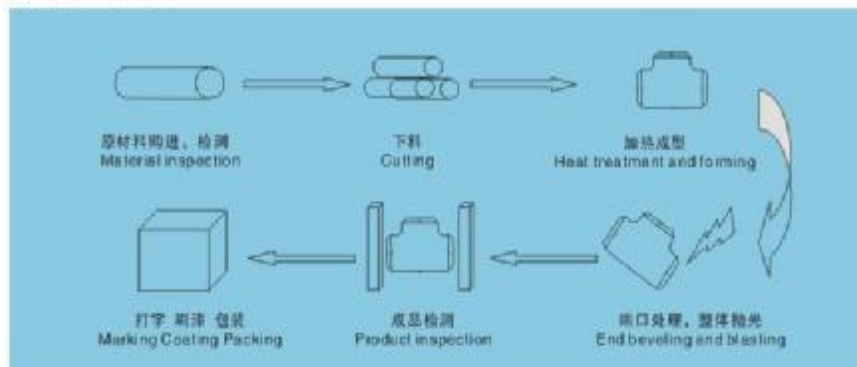




亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD


B: NPS 26"-72"生产过程/ Production process from NPS 26" to 72":

流程图/Flow chart:

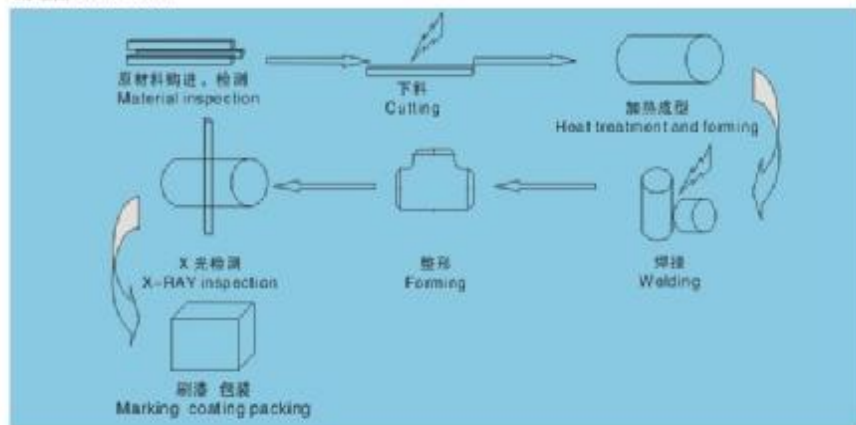

管件生产线/Production Line

3. 对焊异径管/ Butti-welding Reducer:

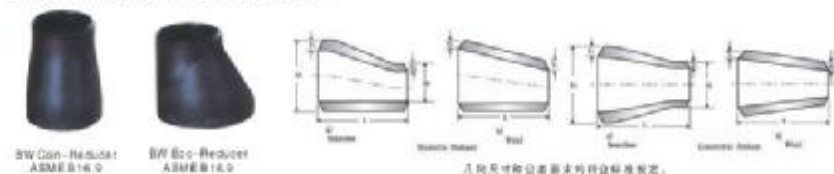

品名：同心异径管/偏心异径管

Name: Con-Reducer, Ecc-Reducer

执行标准: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

Executive Standard: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

原材料/Materials:

碳钢/Carbon steel: ASTM A234 WPB, 20#, Q235

不锈钢/Stainless steel: ASTM A403 WP304/304L, WP316/316L, WP321

表面处理: 黑色或透明漆, 表面抛光, 根据客户要求。

Surface Treatment: black or transparent painting, grit blasting, or according to the requirement

产品应用范围: 石油, 化工, 灌溉, 电力, 造船, 建筑, 钻井平台等。

Application: Petrochemical and chemical company, fertilizer industry, power plant, shipbuilding, construction, offshore platform, etc.


异径管生产线/REDUCER PRODUCTION LINE:

生产过程A为NPS 1/2" 到24", 由管材压制而成;

生产过程B为NPS 26" 到72", 由板材焊接而成, 最大承接外径2400mm;


A: NPS 1/2"-24" 生产过程/ Production process from NPS 1/2" to 24"

流程图/Flow chart:

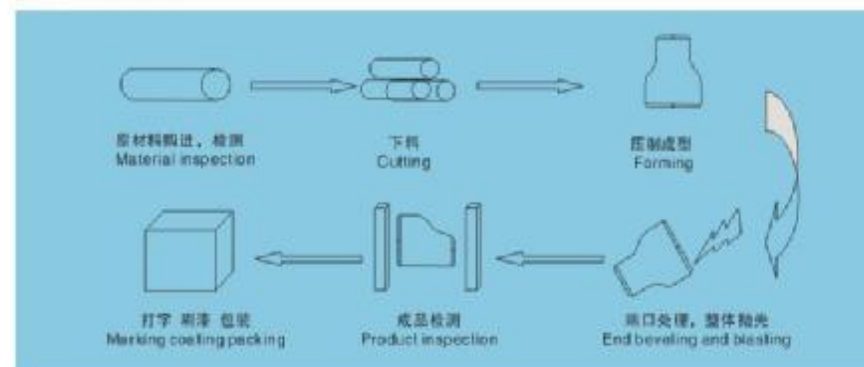

B: NPS 26"-72" 生产过程/ Production process from NPS 26" to 72"

流程图/Flow chart:

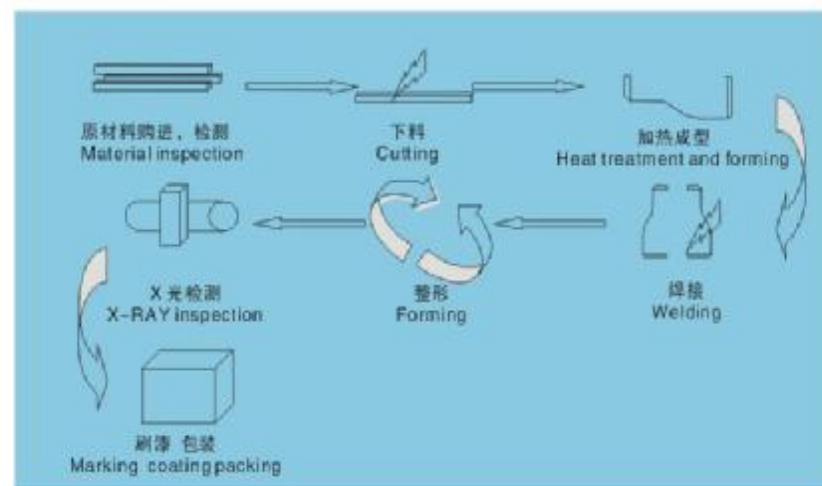



亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd


CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD

管件生产线/Production Line

4. 对焊管帽/ Butt-welding Cap:



BW Cap-ASME



品名: 管帽

Name: Cap

执行标准: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc

Executive Standard: ASME B 16.9, GB/T12459, DIN, JIS, BS, etc.

原材料/Materials:

碳钢/Carbon steel: ASTM A234 WPB, 20#, Q235

不锈钢/Stainless steel: ASTM A403 WP304/304L, WP316/316L, WP321

表面处理: 黑色或透明漆, 表面抛光, 根据客户要求。


Surface Treatment: black or transparent painting, grit blasting, or according to the requirement

产品应用范围: 石油, 化工, 煤炭, 电力, 造船, 建筑, 钻井平台等。

Application: Petrochemical and chemical company, fertilizer industry, powerplant, shipbuilding, construction, offshore platform, etc.

管帽生产线/CAP PRODUCTION LINE:

流程图/Flow chart:

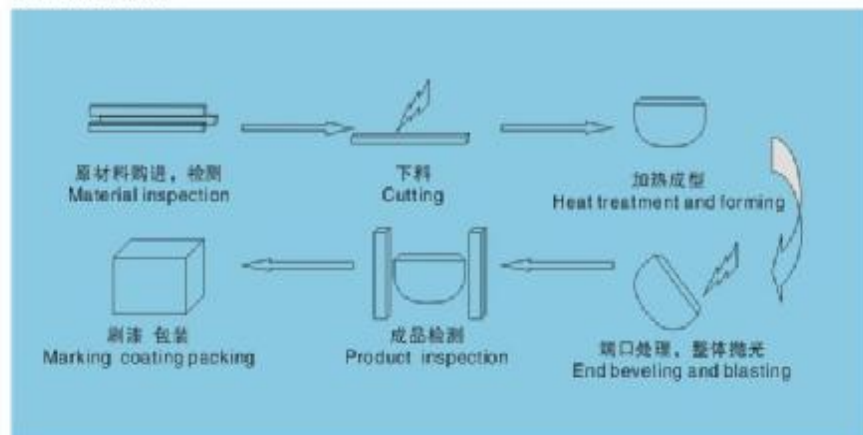

管件生产线/Production Line





亚海金通


沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD

管件生产线/Production Line



流程图/Flow chart:

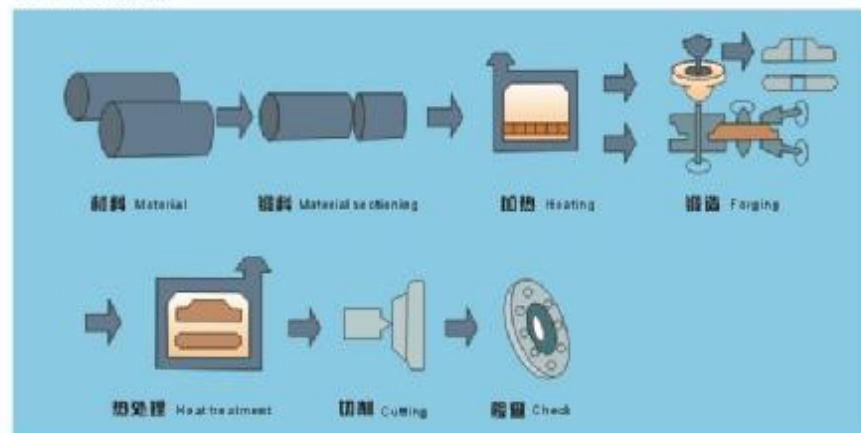

法兰产品/FLANGE



Types of flanges available

1. Pipeline flanges (Weld neck, Slip-on, Threaded, Blind, Socket weld, Lap Joint) to US, British, Japanese and European standards
2. Orifice flanges and Orifice plate
3. Long weld neck flanges
4. Spectacle blinds
5. Tube sheets and baffle plates
6. Large diameter flanges
7. Reducing flanges
8. Wind tower flanges
9. Other special flanges



Types of flanges faces

1. Raised Face
 2. Flat-Face
 3. Ring Joint
 4. Tongue & Groove
 5. Male & Female
- Sizes: 1/2" Thru 200"
Pressure: 1500psi Thru 5000psi



MATERIALS AND GRADE

*Carbon steels: ASTM A105(N), A350, LF2, LF3, A694, A36 ETC. (THE EQUIVALENT ACC. TO DIN, BS, JIS ETC.)
*Stainless steels: ASTM A182 F304/L, F316/L, F316Ti, F310, F317, F347, F321, F44 ETC.
*Alloy steels: ASTM A182 F1, F5A, F6, F7, F9, F11, F12, F22, F51, F55 ETC. (THE EQUIVALENT ACC. TO DIN, BS, JIS ETC.)



STANDARDS AVAILABLE

We can manufacture and supply flanges as per below standards.

A. America standard

ANSI B16.5/ASME B16.5, 6A, 6B/MS SP44/ASME C207

B. Germany standard

DIN 2527/2528/2551/2555/2556/2573/2576/2630/2641/2642/2655/2656/2673/2680/2683/2684

C. British standard

BS 4504 PN16/PN25/PN40, BS10 TABLE E/TABLE D

D. Japan standard

JIS/KS 5K, 10K, 15K, 20K, 30K

E. Italy standard

UNI 2253/2254/22 76-2278/2281-2284/6083/6084/6089-6093

F. Gost standard

12820, 12821

G. Non-standard

We can specially design and manufacture flanges and forgings according to customers' special order with Max. OD is up to 5,000.00mm and unit weight is 6,000.00kgs





亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

CANGZHOU YAHAIJINTONG
PIPE INDUSTRIES CO., LTD


成品库展示/Show picking



美标、日标、德标弯头外径与壁厚 单位mm
ELBOW OUTER DIAMETER AND WALL THICKNESS STANDARDS(GERMANY,USA,JAPAN)


NOMINAL PIPE SIZE		OUTSIDE DIAMETER										NOMINAL WALL THICKNESS										NOMINAL PIPE SIZE	
A	B	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	3 1/2	4	5	6	8	10	12	14	16	18	20	A	B	
15	15	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	21.3	15	15	
20	20	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.7	20	20	
25	25	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	33.4	25	25	
30	30	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	42.3	30	30	
35	35	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	48.3	35	35	
40	40	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	50.3	40	40	
45	45	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	53.0	45	45	
50	50	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	57.0	50	50	
55	55	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	60.0	55	55	
60	60	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5	60	60	
65	65	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	67.0	65	65	
70	70	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70.0	70	70	
75	75	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	73.0	75	75	
80	80	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	76.0	80	80	
85	85	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	79.0	85	85	
90	90	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	82.0	90	90	
95	95	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	85.0	95	95	
100	100	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	88.0	100	100	
105	105	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	91.0	105	105	
110	110	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	94.0	110	110	
115	115	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	97.0	115	115	
120	120	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	100.0	120	120	
125	125	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	103.0	125	125	
130	130	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	106.0	130	130	
135	135	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	109.0	135	135	
140	140	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	112.0	140	140	
145	145	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	115.0	145	145	
150	150	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	118.0	150	150	
155	155	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	121.0	155	155	
160	160	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	124.0	160	160	
165	165	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	127.0	165	165	
170	170	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	130.0	170	170	
175	175	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	133.0	175	175	
180	180	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	136.0	180	180	
185	185	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	139.0	185	185	
190	190	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	142.0	190	190	
195	195	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	145.0	195	195	
200	200	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	148.0	200	200	
205	205	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	151.0	205	205	
210	210	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	154.0	210	210	
215	215	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	215	215	
220	220	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	160.0	220	220	
225	225	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	163.0	225	225	
230	230	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	166.0	230	230	
235	235	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	235	235	
240	240	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	172.0	240	240	
245	245	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	175.0	245	245	
250	250	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	178.0	250	250	
255	255	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	181.0	255	255	
260	260	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	184.0	260	260	
265	265	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	187.0	265	265	
270	270	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	190.0	270	270	
275	275	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	275	275	
280	280	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	280	280	
285	285	199.0	199.0																				

Production standards of Elbows
 弯头生产标准



GB 12459, GB/T 13401-92


公称通径 Nominal Dia. DN	通径系列 Nominal Dia. DN		中心距系列 Center End			中心距系列 Center to Center		通径系列 End to End	
			系列 A 系列 B		系列 A 系列 B		系列 A 系列 B		
	G		H		I		K		
	系列 A Series A	系列 B Series B	系列 A Series A	系列 B Series B	系列 A Series A	系列 B Series B	系列 A Series A	系列 B Series B	
15	21.3	15	18	25	18	25	18	25	
20	26.8	20	22	30	22	30	22	30	
25	32.4	25	28	36	28	36	28	36	
30	38.1	30	34	42	34	42	34	42	
35	42.4	35	38	48	38	48	38	48	
40	48.3	40	44	54	44	54	44	54	
45	50.8	45	47	57	47	57	47	57	
50	56.4	50	52	63	52	63	52	63	
55	60.3	55	56	68	56	68	56	68	
60	66.0	60	62	74	62	74	62	74	
65	71.1	65	67	80	67	80	67	80	
70	76.2	70	72	86	72	86	72	86	
75	81.3	75	77	92	77	92	77	92	
80	86.4	80	82	98	82	98	82	98	
85	91.5	85	87	104	87	104	87	104	
90	96.5	90	92	110	92	110	92	110	
95	101.6	95	97	116	97	116	97	116	
100	106.7	100	102	122	102	122	102	122	
105	111.8	105	107	128	107	128	107	128	
110	116.8	110	112	134	112	134	112	134	
115	121.9	115	117	140	117	140	117	140	
120	127.0	120	122	146	122	146	122	146	
125	132.1	125	127	152	127	152	127	152	
130	137.2	130	132	158	132	158	132	158	
135	142.3	135	137	164	137	164	137	164	
140	147.3	140	142	170	142	170	142	170	
145	152.4	145	147	176	147	176	147	176	
150	157.5	150	152	182	152	182	152	182	
155	162.5	155	157	188	157	188	157	188	
160	167.6	160	162	194	162	194	162	194	
165	172.7	165	167	200	167	200	167	200	
170	177.8	170	172	206	172	206	172	206	
175	182.9	175	177	212	177	212	177	212	
180	188.0	180	182	218	182	218	182	218	
185	193.0	185	187	224	187	224	187	224	
190	198.1	190	192	230	192	230	192	230	
195	203.2	195	197	236	197	236	197	236	
200	208.3	200	202	242	202	242	202	242	
205	213.3	205	207	248	207	248	207	248	
210	218.4	210	212	254	212	254	212	254	
215	223.5	215	217	260	217	260	217	260	
220	228.6	220	222	266	222	266	222	266	
225	233.7	225	227	272	227	272	227	272	
230	238.8	230	232	278	232	278	232	278	
235	243.9	235	237	284	237	284	237	284	
240	248.9	240	242	290	242	290	242	290	
245	254.0	245	247	296	247	296	247	296	
250	259.1	250	252	302	252	302	252	302	
255	264.2	255	257	308	257	308	257	308	
260	269.3	260	262	314	262	314	262	314	
265	274.4	265	267	320	267	320	267	320	
270	279.5	270	272	326	272	326	272	326	
275	284.6	275	277	332	277	332	277	332	
280	289.7	280	282	338	282	338	282	338	
285	294.8	285	287	344	287	344	287	344	
290	300.0	290	292	350	292	350	292	350	
295	305.1	295	297	356	297	356	297	356	
300	310.2	300	302	362	302	362	302	362	
305	315.3	305	307	368	307	368	307	368	
310	320.4	310	312	374	312	374	312	374	
315	325.5	315	317	380	317	380	317	380	
320	330.6	320	322	386	322	386	322	386	
325	335.7	325	327	392	327	392	327	392	
330	340.8	330	332	398	332	398	332	398	
335	345.9	335	337	404	337	404	337	404	
340	351.0	340	342	410	342	410	342	410	
345	356.1	345	347	416	347	416	347	416	
350	361.2	350	352	422	352	422	352	422	
355	366.3	355	357	428	357	428	357	428	
360	371.4	360	362	434	362	434	362	434	
365	376.5	365	367	440	367	440	367	440	
370	381.6	370	372	446	372	446	372	446	
375	386.7	375	377	452	377	452	377	452	
380	391.8	380	382	458	382	458	382	458	
385	396.9	385	387	464	387	464	387	464	
390	402.0	390	392	470	392	470	392	470	
395	407.1	395	397	476	397	476	397	476	
400	412.2	400	402	482	402	482	402	482	
405	417.3	405	407	488	407	488	407	488	
410	422.4	410	412	494	412	494	412	494	
415	427.5	415	417	500	417	500	417	500	
420	432.6	420	422	506	422	506	422	506	
425	437.7	425	427	512	427	512	427	512	
430	442.8	430	432	518	432	518	432	518	
435	447.9	435	437	524	437	524	437	524	
440	453.0	440	442	530	442	530	442	530	
445	458.1	445	447	536	447	536	447	536	
450	463.2	450	452	542	452	542	452	542	
455	468.3	455	457	548	457	548	457	548	
460	473.4	460	462	554	462	554	462	554	
465	478.5	465	467	560	467	560	467	560	
470	483.6	470	472	566	472	566	472	566	
475	488.7	475	477	572	477	572	477	572	
480	493.8	480	482	578	482	578	482	578	
485	498.9	485	487	584	487	584	487	584	
490	504.0	490	492	590	492	590	492	590	
495	509.1	495	497	596	497	596	497	596	
500	514.2	500	502	602	502	602	502	602	
505	519.3	505	507	608	507	608	507	608	
510	524.4	510	512	614	512	614	512	614	
515	529.5	515	517	620	517	620	517	620	
520	534.6	520	522	626	522	626	522	626	
525	539.7	525	527	632	527	632	527	632	
530	544.8	530	532	638	532	638	532	638	
535	549.9	535	537	644	537	644	537	644	
540	555.0	540	542	650	542	650	542	650	
545	560.1	545	547	656	547	656	547	656	
550	565.2	550	552	662	552	662	552	662	
555	570.3	555	557	668	557	668	557	668	
560	575.4	560	562	674	562	674	562	674	
565	580.5	565	567	680	567	680	567	680	
570	585.6	570	572	686	572	686	572	686	
575	590.7	575	577	692	577	692	577	692	
580	595.8	580	582	698	582	698	582	698	
585	600.9	585	587	704	587	704	587	704	
590	606.0	590	592	710	592	710	592	710	
595	611.1	595	597	716	597	716	597	716	
600	616.2	600	602	722	602	722	602	722	
605	621.3	605	607	728	607	728	607	728	
610	626.4	610	612	734	612	734	612	734	
615	631.5	615	617	740	617	740	617	740	
620	636.6	620	622	746	622	746	622	746	
625	641.7	625	627	752	627	752	627	752	
630	646.8	630	632	758	632	758	632	758	
635	651.9	635	637	764	637	764	637	764	
640	657.0	640	642	770	642	770	642	770	
645	662.1	645	647	776	647	776	647	776	
650	667.2	650	652	782	652	782	652	782	
655	672.3	655	657	788	657	788	657	788	
660	677.4	660	662	794	662	794	662	794	
665	682.5	665	667	800	667	800	667	800	
670	687.6	670	672	806	672	806	672	806	
675	692.7	675	677	812	677	812	677	812	
680	697.8	680	682	818	682	818	682	818	
685	702.9	685	687	824	687	824	687	824	
690	708.0	690	692	830	692	830	692	830	
695	713.1	695	697	836	697	836	697	836	
700	718.2	700	702	842	702	842	702	842	
705	723.3	705	707	848	707	848	707	848	
710	728.4	710	712	854	712	854	712	854	
715	733.5	715	717	860	717	860	717	860	
720	738.6	720	722	866	722	866	722	866	
725	743.7	725	727	872	727	872	727	872	
730	748.8	730	732	878	732	878	732	878	
735	753.9	735	737	884	737	884	737	884	
740	759.0	740	742	890	742	890	742	890	
745	764.1	745	747	896	747	896	747	896	
750	769.2	750	752	902	752	902	752	902	
755	774.3	755	757	908	757	908	757	908	
760	779.4	760	762	914	762	914	762	914	
765	784.5	765	767	920	767	920	767	920	
770	789.6	770	772	926	772	926	772	926	
775	794.7	775	777	932	777	932	777	932	
780	799.8	780	782	938	782	938	782	938	
785	804.9</								



沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

技术参数 Technical parameter

Production standards of caps
管帽部分生产标准



GB 12459, GB/T 13401(SH3408-96 SH3409-96)

公称通径 Nominal Dia DN	管帽外径 Overall Dia of End		管帽后背面尺寸 Back to Back End Surfaces Size		对尺寸E的附加厚度 The Restricted Thickness to Size E
	A系列 A Series	B系列 B Series	E	ET	
18	21.3	18	35	-	
20	24.0	20	35	-	
25	33.7	32	38	-	
32	42.4	38	38	-	
40	48.3	45	38	-	
50	60.3	57	38	44	5.6
65	76.1(73)	73	38	51	7.8
80	88.9	86	61	64	7.8
100	114.3	108	64	70	8.1
125	139.7	133	76	89	8.8
150	168.3	158	89	102	9.6
200	219.1	216	102	127	11.0
250	273	273	127	152	12.7
300	323.9	324	152	178	12.7
350	368.6	377	185	191	12.7
400	409.4	426	178	203	12.7
450	457	478	203	229	12.7
500	508	526	229	254	12.7
550	559	-	254	254	12.7
600	610	636	267	302	12.7
650	660	-	267	-	
700	711	736	267	-	
750	762	-	267	-	
800	813	826	267	-	
850	864	-	267	-	
900	914	926	267	-	
1000	1016	1020	308	-	
1100	1118	1129	343	-	
1200	1220	1220	343	-	
1300	1321	1320	398	-	
1400	1426	1420	398	-	
1500	1524	1520	405	-	

重量为理论重量

长半径弯头
规格 重量



Elbows
Long Radius
ASME/ANSI B16.9
MSS SP-43

Nominal Pipe Size 公称通径 英寸	Dimensions			Center to End Face Center to Center Back to Face mm	Wall Thickness 壁 厚			Approx. Weight 重量
	Outside Diameter 外径		Sch 40		t			
	inch 英寸	mm			inch 英寸	mm		
1/2	0.840	21.3	A=38.1 B=47.8 C=70.2 D=47.8	5S	0.065	1.65	0.03	
				10S	0.083	2.11	0.06	
				20/40 40S	0.100	2.77	0.08	
				X 50/60 60S	0.147	3.73	0.10	
				160	0.188	4.78		
			X X S	0.204	7.47			
3/4	1.050	26.7	A=38.1 B=48.1 C=70.2 D=48.1	5S	0.065	1.65	0.06	
				10S	0.083	2.11	0.08	
				20/40 40S	0.100	2.67	0.11	
				X 50/60 60S	0.154	3.91	0.14	
				160	0.219	5.56		
			X X S	0.308	7.82			
1	1.315	33.4	A=38.1 B=52.4 C=76.2 D=55.8	5S	0.065	1.65	0.08	
				10S	0.100	2.77	0.13	
				20/40 40S	0.123	3.30	0.18	
				X 50/60 60S	0.170	4.55	0.28	
				160	0.250	6.35	0.35	
			X X S	0.359	9.00	0.38		
1 1/4	1.600	42.2	A=47.8 B=57.2 C=81.3 D=59.8	5S	0.065	1.65	0.21	
				10S	0.100	2.77	0.24	
				20/40 40S	0.140	3.50	0.28	
				X 50/60 60S	0.181	4.65	0.35	
				160	0.250	6.35	0.42	
			X X S	0.385	9.70	0.54		
1 1/2	1.900	48.3	A=57.2 B=67.2 C=104.3 D=82.0	5S	0.065	1.65	0.37	
				10S	0.100	2.77	0.38	
				20/40 40S	0.145	3.68	0.37	
				X 50/60 60S	0.200	5.08	0.50	
				160	0.281	7.14	0.65	
			X X S	0.400	10.15	0.93		
2	2.375	60.3	A=79.2 B=89.1 C=152.4 D=108.4	5S	0.065	1.65	0.68	
				10S	0.100	2.77	0.45	
				20/40 40S	0.154	3.91	0.66	
				X 50/60 60S	0.218	5.54	0.90	
				160	0.244	6.74	1.33	
			X X S	0.426	11.07	1.61		
2 1/2	2.875	73.9	A=95.3 B=105.3 C=152.4 D=131.8	5S	0.065	1.65	0.86	
				10S	0.100	2.77	0.86	
				20/40 40S	0.203	5.16	1.29	
				X 50/60 60S	0.270	7.91	1.79	
				160	0.375	9.53	2.33	
			X X S	0.552	14.02	3.43		
3	3.500	88.9	A=114.3 B=124.3 C=152.4 D=158.8	5S	0.065	1.65	0.98	
				10S	0.100	2.77	1.17	
				20/40 40S	0.218	5.49	2.04	
				X 50/60 60S	0.300	7.62	2.74	
				160	0.438	11.13	3.83	
			X X S	0.600	15.24	6.35		
4	4.500	114.3	A=132.4 B=142.4 C=152.4 D=150.8	5S	0.065	1.65	1.39	
				10S	0.100	2.77	2.03	
				20/40 40S	0.227	5.82	2.95	
				X 50/60 60S	0.327	8.29	3.98	
				160	0.438	11.13	5.78	
			X X S	0.531	13.48	9.03		
			X X S	0.674	17.12	18.2		
5	5.500	141.3	A=152.4 B=162.4 C=152.4 D=161.0	5S	0.065	1.65	2.82	
				10S	0.100	2.77	3.45	
				20/40 40S	0.258	6.55	6.51	
				X 50/60 60S	0.375	9.53	9.27	
				160	0.500	12.70	17.1	
			X X S	0.625	15.88	14.7		
			X X S	0.760	19.29	17.8		


重量为理论重量



沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

技术参数 Technical parameter

长半径弯头
规格 重量



Elbow
Long Radius
ASME/ANSI B16.9
MSS SP-43

Nominal Pipe Size 公称通径 英寸	Dimensions			Wall Thickness 壁厚			Approx. Weight 重量
	Outside Diameter at Bore/D 英寸		Center to End-A/B Center to Center-C Back to Face-D mm	Sch 160	t		
	英寸	mm			英寸	mm	
6	6.625	168.3	A=226.0 B=95.3 C=457.2 K=312.7	5s	0.100	2.57	4.10
				10s	0.124	3.15	4.90
				Std 40-40s	0.250	6.35	10.10
				XS 40 38s	0.402	10.21	15.30
				120	0.562	14.27	20.60
				160	0.710	18.28	24.20
8	8.625	219.1	A=284.8 B=127.6 C=609.6 K=414.3	XS 5	0.864	21.93	39.10
				5s	0.100	2.57	7.15
				10s	0.148	3.76	9.65
				20	0.250	6.35	15.00
				30	0.377	9.57	22.50
				Std 40-40s	0.502	12.75	30.40
				40	0.606	15.39	35.40
				XS 60 80s	0.800	20.32	48.00
				100	0.904	23.00	53.30
				120	0.971	24.71	57.30
				140	1.040	26.67	61.70
				160	1.105	28.18	65.70
10	10.750	273.0	A=351.6 B=158.8 C=762.0 K=517.7	XS 5	0.905	23.00	51.70
				5s	0.124	3.15	8.70
				10s	0.165	4.19	10.70
				20	0.250	6.35	15.00
				30	0.377	9.57	22.50
				Std 40-40s	0.502	12.75	30.40
				XS 60 80s	0.800	20.32	48.00
				100	0.904	23.00	53.30
				120	0.971	24.71	57.30
				140	1.040	26.67	61.70
				160	1.105	28.18	65.70
				12	12.750	323.8	A=457.2 B=196.5 C=914.4 K=619.3
5s	0.156	3.96	13.00				
10s	0.180	4.57	15.10				
20	0.250	6.35	21.00				
30	0.377	9.57	31.50				
Std 40-40s	0.502	12.75	40.00				
XS 60 80s	0.800	20.32	63.00				
100	0.904	23.00	70.00				
120	0.971	24.71	74.00				
140	1.040	26.67	78.00				
160	1.105	28.18	82.00				
180	1.170	29.69	86.00				
200	1.235	31.20	90.00				
220	1.300	32.71	94.00				
240	1.365	34.22	98.00				
260	1.430	35.73	102.00				
14	14.000	355.6	A=530.4 B=222.3 C=1066.8 K=711.2				
				10s	0.180	4.57	15.10
				20	0.250	6.35	21.00
				30	0.377	9.57	31.50
				Std 40-40s	0.502	12.75	40.00
				XS 60 80s	0.800	20.32	63.00
				100	0.904	23.00	70.00
				120	0.971	24.71	74.00
				140	1.040	26.67	78.00
				160	1.105	28.18	82.00
				180	1.170	29.69	86.00
				200	1.235	31.20	90.00

长半径弯头
规格 重量



Elbow
Long Radius
ASME/ANSI B16.9
MSS SP-43

Nominal Pipe Size 公称通径 英寸	Dimensions			Sch 160	Wall Thickness 壁厚		Approx. Weight 重量 kg
	Outside Diameter at Bore/D 外径		Center to End-A/B Center to Center-C Back to Face-D mm		t		
	inches 英寸	mm			inches 英寸	mm	
10	10.000	400.0	A=354.0 B=125.0 C=1210.2 K=812.8	5s	0.165	4.19	50.50
				10s	0.188	4.78	40.50
				20	0.250	6.35	74.30
				30	0.312	7.92	90.00
				Std 40	0.375	9.53	90.50
				XS 40	0.500	12.70	188.00
				60	0.656	16.66	150.00
				80	0.844	21.44	195.00
				100	1.001	25.40	256.00
				120	1.219	30.96	274.00
				140	1.408	35.83	316.00
				160	1.594	40.40	250.00
18	18.000	457.0	A=485.8 B=200.8 C=1301.8 K=944.4	5s	0.165	4.19	50.50
				10s	0.188	4.78	57.30
				20	0.250	6.35	76.10
				30	0.312	7.92	94.50
				40	0.408	10.39	103.00
				Std 40	0.500	12.70	150.00
				60	0.656	16.66	188.00
				80	0.750	19.05	222.00
				90	0.937	23.83	274.00
				100	1.125	28.58	324.00
				120	1.375	34.93	360.00
				140	1.562	39.67	440.00
160	1.781	45.24	495.00				
20	20.000	508.0	A=562.0 B=217.5 C=1524.8 K=1066.8	5s	0.188	4.78	71.30
				10s	0.218	5.54	81.50
				20	0.250	6.35	94.50
				Std 40	0.375	9.53	140.00
				XS 40	0.500	12.70	188.00
				60	0.656	16.66	220.00
				80	0.812	20.82	260.00
				90	1.001	25.19	372.00
				100	1.281	32.54	457.00
				120	1.580	38.10	528.00
				140	1.759	44.45	609.00
				160	1.989	50.01	678.00
22	22.000	559.0	A=638.2 B=242.9 C=1676.4 K=1117.8	5s	0.188	4.78	86.30
				10s	0.218	5.54	98.80
				20	0.250	6.35	114.00
				Std 40	0.375	9.53	170.00
				XS 40	0.500	12.70	225.00
				60	0.656	16.66	285.00
				80	1.125	28.58	460.00
				100	1.375	34.93	594.00
				120	1.625	41.29	694.00
				140	1.875	47.63	790.00
				160	2.125	53.98	906.00



亚海金通

沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd


技术参数 Technical parameter

长半径弯头
规格 重量



Elbow
Long Radius
ASME/ANSI B16.9
MSS SP-43

三通
规格 重量



Seamless
Straight and Reducing Outlet Tees
ASME/ANSI B16.9

Nominal Pipe Size 公称通径 inch 英寸	Dimensions			Center to End A/B Center to Center C Back to Face F mm	Wall Thickness 壁 厚			Approx. Weight 重 量 kg
	Outside Diameter at Bevel D 中 径		Sch.40 S40		t			
	inch 英寸	mm			inch 英寸	mm		
24	24.000	608.8	A=514.4 B=261.0 C=1828.8 D=1219.2	5s	0.219	5.54	119.00	
				10s	0.250	6.35	137.00	
				10	0.250	6.35	136.00	
				Std40	0.375	9.53	262.00	
				XS	0.500	12.70	269.00	
				30	0.562	14.27	381.00	
				40	0.688	17.48	366.00	
				60	0.860	21.84	510.00	
				80	1.219	30.90	636.00	
				100	1.521	38.99	795.00	
				120	1.812	46.02	919.00	
				140	2.062	52.37	1093.00	
160	2.344	59.54	1180.00					
26	26.000	660.8	A=500.8 B=406.4	10	0.312	7.92	199.00	
				30	0.375	9.53	238.00	
				X.50N	0.500	12.70	316.00	
28	28.000	711.8	A=1905.5 B=438.2	10	0.312	7.92	230.00	
				30	0.375	9.53	276.00	
				X.50N	0.500	12.70	347.00	
30	30.000	762.0	A=1143.0 B=460.0	20	0.625	15.88	456.00	
				5s	0.250	6.35	-	
				10s	0.312	7.92	-	
32	32.000	813.0	A=1219.2 B=511.3	10	0.212	7.92	244.00	
				30	0.375	9.53	310.00	
				X.50N	0.500	12.70	421.00	
				20	0.625	15.88	524.00	
				10	0.312	7.92	381.00	
34	34.000	864.0	A=1266.4 B=533.4	30	0.375	9.53	342.00	
				X.50N	0.500	12.70	486.00	
				20	0.625	15.88	597.00	
				40	0.868	21.94	856.00	
				10	0.312	7.92	340.00	
36	36.000	914.0	A=1371.0 B=556.2	30	0.375	9.53	409.00	
				X.50N	0.500	12.70	543.00	
				20	0.625	15.88	675.00	
				40	0.868	21.94	742.00	
				10	0.312	7.92	381.00	
38	38.000	965.0	A=1447.8 B=580.0	30	0.375	9.53	428.00	
				X.50N	0.500	12.70	608.00	
				20	0.625	15.88	758.00	
				40	0.868	21.94	966.00	
				10	0.312	7.92	381.00	
40	40.000	1016.0	A=1524.0 B=610.0	30	0.375	9.53	460.00	
				X.50N	0.500	12.70	753.00	
				20	0.625	15.88	922.00	
				40	0.868	21.94	1238.00	
				10	0.312	7.92	421.00	
42	42.000	1067.0	A=1600.2 B=640.0	30	0.375	9.53	482.00	
				X.50N	0.500	12.70	828.00	
				20	0.625	15.88	1026.00	
				40	0.868	21.94	1304.00	
				10	0.312	7.92	460.00	
44	44.000	1117.8	A=1676.6 B=665.2	30	0.375	9.53	504.00	
				X.50N	0.500	12.70	812.00	
				20	0.625	15.88	1010.00	
				40	0.868	21.94	1288.00	
				10	0.312	7.92	480.00	
46	46.000	1168.0	A=1752.6 B=691.2	30	0.375	9.53	540.00	
				X.50N	0.500	12.70	867.00	
				20	0.625	15.88	1065.00	
				40	0.868	21.94	1343.00	
				10	0.312	7.92	500.00	
48	48.000	1219.2	A=1828.8 B=716.8	30	0.375	9.53	574.00	
				X.50N	0.500	12.70	885.00	
				20	0.625	15.88	1083.00	
				40	0.868	21.94	1361.00	
				10	0.312	7.92	520.00	

Nominal Pipe Size (NPS) 公称通径 inch 英寸	Dimensions				Wall Thickness-Approx. Weight 壁厚														
	Outside Diameter at Bevel D/D1 mm		Center to End mm		Sch.20			Sch.30			STD			Sch.40			Sch.60		
	D	O ₁	C	M	t	T	Hg	t	T	Hg	t	T	Hg	t	T	Hg	t	T	Hg
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
1.315-1.315	48.3	48.3	557.2	57.2	-	-	-	-	-	2.77	2.77	3.74	2.77	2.77	0.74	-	-	-	-
2-2.348	60.3	60.3	635.5	44.5	-	-	-	-	-	2.08	2.07	2.85	2.07	2.07	0.65	-	-	-	-
2.5-3	-	73.0	635.5	57.2	-	-	-	-	-	2.28	2.28	3.00	2.28	2.28	0.70	-	-	-	-
3-3.548	-	89.1	635.5	57.2	-	-	-	-	-	2.56	2.56	3.35	2.56	2.56	0.75	-	-	-	-
4-4.512	-	114.3	635.5	57.2	-	-	-	-	-	2.68	2.68	3.50	2.68	2.68	0.79	-	-	-	-
5-5.512	-	141.3	635.5	57.2	-	-	-	-	-	3.01	3.01	3.86	3.01	3.01	0.85	-	-	-	-
6-6.625	73.0	73.0	762.0	57.2	-	-	-	-	-	3.15	3.15	4.00	3.15	3.15	0.90	-	-	-	-
8-8.625	-	193.0	762.0	57.2	-	-	-	-	-	3.56	3.56	4.50	3.56	3.56	1.00	-	-	-	-
10-10.750	-	254.0	762.0	57.2	-	-	-	-	-	3.68	3.68	4.75	3.68	3.68	1.05	-	-	-	-
12-12.750	-	325.0	762.0	57.2	-	-	-	-	-	3.91	3.91	5.00	3.91	3.91	1.10	-	-	-	-
14-14.750	-	356.0	762.0	57.2	-	-	-	-	-	4.00	4.00	5.25	4.00	4.00	1.15	-	-	-	-
16-16.750	-	406.4	762.0	57.2	-	-	-	-	-	4.19	4.19	5.50	4.19	4.19	1.20	-	-	-	-
18-18.750	-	477.8	762.0	57.2	-	-	-	-	-	4.40	4.40	5.75	4.40	4.40	1.25	-	-	-	-
20-20.750	-	516.0	762.0	57.2	-	-	-	-	-	4.57	4.57	6.00	4.57	4.57	1.30	-	-	-	-
22-22.750	-	571.5	762.0	57.2	-	-	-	-	-	4.78	4.78	6.25	4.78	4.78	1.35	-	-	-	-
24-24.750	-	625.0	762.0	57.2	-	-	-	-	-	4.95	4.95	6.50	4.95	4.95	1.40	-	-	-	-
26-26.750	-	676.0	762.0	57.2	-	-	-	-	-	5.15	5.15	6.75	5.15	5.15	1.45	-	-	-	-
28-28.750	-	726.0	762.0	57.2	-	-	-	-	-	5.30	5.30	7.00	5.30	5.30	1.50	-	-	-	-
30-30.750	-	776.0	762.0	57.2	-	-	-	-	-	5.49	5.49	7.25	5.49	5.49	1.55	-	-	-	-
32-32.750	-	825.0	762.0	57.2	-	-	-	-	-	5.68	5.68	7.50	5.68	5.68	1.60	-	-	-	-
34-34.750	-	875.0	762.0	57.2	-	-	-	-	-	5.86	5.86	7.75	5.86	5.86	1.65	-	-	-	-
36-36.750	-	925.0	762.0	57.2	-	-	-	-	-	6.03	6.03	8.00	6.03	6.03	1.70	-	-	-	-
38-38.750	-	975.0	762.0	57.2	-	-	-	-	-	6.20	6.20	8.25	6.20	6.20	1.75	-	-	-	-
40-40.750	-	1025.0	762.0	57.2	-	-	-	-	-	6.38	6.38	8.50	6.38	6.38	1.80	-	-	-	-
42-42.750	-	1075.0	762.0	57.2	-	-	-	-	-	6.55	6.55	8.75	6.55	6.55	1.85	-	-	-	-
44-44.750	-	1125.0	762.0	57.2	-	-	-	-	-	6.73	6.73	9.00	6.73	6.73	1.90	-	-	-	-
46-46.750	-	1175.0	762.0	57.2	-	-	-	-	-	6.90	6.90	9.25	6.90	6.90	1.95	-	-	-	-
48-48.750	-	1225.0	762.0	57.2	-	-	-	-	-	7.08	7.08	9.50	7.08	7.08	2.00	-	-	-	-
50-50.750	-	1275.0	762.0	57.2	-	-	-	-	-	7.25	7.25	9.75	7.25	7.25	2.05	-	-	-	-
52-52.750	-	1325.0	762.0	57.2	-	-	-	-	-	7.43	7.43	10.00	7.43	7.43	2.10	-	-	-	-
54-54.750	-	1375.0	762.0	57.2	-	-	-	-	-	7.60	7.60	10.25	7.60	7.60	2.15	-	-	-	-
56-56.750	-	1425.0	762.0	57.2	-	-	-	-	-	7.78	7.78	10.50	7.78	7.78	2.20	-	-	-	-
58-58.750	-	1475.0	762.0	57.2	-	-	-	-	-	7.95	7.95	10.75	7.95	7.95	2.25	-	-	-	-
60-60.750	-	1525.0	762.0	57.2	-	-	-	-	-	8.13	8.13	11.00	8.13	8.13	2.30	-	-	-	-
62-62.750	-	1575.0	762.0	57.2	-	-	-	-	-	8.31	8.31	11.25	8.31	8.31	2.35	-	-	-	-
64-64.750	-	1625.0	762.0	57.2	-	-	-	-	-	8.49	8.49	11.50	8.49	8.49	2.40	-	-	-	-
66-66.750	-	1675.0	762.0	57.2	-	-	-	-	-	8.67	8.67	11.75	8.67	8.67	2.45	-	-	-	-
68-68.750	-	1725.0	762.0	57.2	-	-	-	-	-	8.85	8.85	12.00	8.85	8.85	2.50	-	-	-	-
70-70.750	-	1775.0	762.0	57.2	-	-	-	-	-	9.03	9.03	12.25	9.03	9.03	2.55	-	-	-	-
72-72.750	-	1825.0	762.0	57.2	-	-	-	-	-	9.21	9.21	12.50	9.21	9.21	2.60	-	-	-	-
74-74.750	-	1875.0	762.0	57.2	-	-	-	-	-	9.39	9.39	12.75	9.39	9.39	2.65	-	-	-	-
76-76.750	-	1925.0	762.0	57.2	-	-	-	-	-	9.57	9.57	13.00	9.57	9.57	2.70	-	-	-	-
78-78.750	-	1975.0	762.0	57.2	-	-	-	-	-	9.75	9.75	13.25	9.75	9.75	2.75	-	-	-	-
80-80.750	-	2025.0	762.0	57.2	-	-	-	-	-	9.93	9.93	13.50	9.93	9.93	2.80	-	-	-	-
82-82.750	-	2075.0	762.0	57.2	-	-	-	-	-	10.11	10.11	13.75	10.11	10.11	2.85	-	-	-	-
84-84.750	-	2125.0	762.0	57.2	-	-	-	-	-	10.29	10.29	14.00	10.29	10.29	2.90	-	-	-	-
86-86.750	-	2175.0	762.0	57.2	-	-	-	-	-	10.47	10.47	14.25	10.47	10.47	2.95	-	-	-	-
88-88.750	-	2225.0	762.0	57.2	-	-	-	-	-	10.65	10.65	14.50	10.65	10.65	3.00	-	-	-	-
90-90.750	-	2275.0	762.0	57.2	-	-	-	-	-	10.83	10.83	14.75	10.83	10.83	3.05	-	-	-	-
92-92.750	-	2325.0	762.0	57.2	-	-	-	-	-	11.01	11.01	15.00	11.01	11.01	3.10	-	-	-	-
94-94.750	-	2375.0	762.0	57.2	-	-	-	-	-	11.19	11.19	15.25	11.19	11.19	3.15	-	-	-	-
96-96.750	-	2425.0	762.0	57.2	-	-	-	-	-	11.37	11.37	15.50	11.37	11.37	3.20	-	-	-	-
98-98.750	-	2475.0	762.0	57.2	-	-	-	-	-	11.55	11.55	15.75	11.55	11.55	3.25	-	-	-	-
100-100.750	-	2525.0	762.0	57.2	-	-	-	-	-	11.73	11.73	16.00	11.73	11.73	3.30	-	-	-	-
102-102.750	-	2575.0	762.0	57.2	-	-	-	-	-	11.91	11.91	16.25	11.91	11.91	3.35	-	-	-	-
104-104.750	-	2625.0	762.0	57.2	-	-	-	-	-	12.09	12.09	16.50	12.09	12.09	3.40	-	-	-	-
106-106.750	-	2675.0	762.0	57.2	-	-	-	-	-	12.27	12.27	16.75	12.27	12.27	3.45	-	-	-	-
108-108.750	-	2725.0	762.0	57.2	-	-	-	-	-	12.45	12.45	17.00	12.45	12.45	3.50	-	-	-	-
110-110.750	-	2775.0	762.0	57.2	-	-	-	-	-	12.63	12.63	17.25	12.63	12.63	3.55	-	-	-	-
112-112.750	-	2825.0	762.0	57.2	-	-	-	-	-	12.81	12.81	17.50	12.81	12.81	3.60	-	-	-	-
114-114.750	-	2875.0	762.0	57.2	-	-	-	-	-	12.99	12.99	17.75	12.99	12.99	3.65	-	-	-	-
116-116.750	-	2925.0	762.0	57.2	-	-	-	-	-	13.17	13.17	18.00	13.17	13.17	3.70	-	-	-	-
118-118.750	-	2975.0	762.0	57.2	-	-	-	-	-	13.35	13.35	18.25	13.35	13.35	3.75	-	-	-	-
120-120.750	-	3025.0	762.0	57.2	-	-	-	-	-	13.53	13.53	18.50	13.53	13.53	3.80	-	-	-	-
122-122.750	-	3075.0	762.0	57.2	-	-	-	-	-	13.71	13.71	18.75	13.71	13.71	3.85	-	-	-	-
124-124.750	-	3125.0	762.0	57.2	-	-	-	-	-	13.89	13.89	19.00	13.89	13.89	3.90	-	-	-	-
126-126.750	-	3175.0	762.0	57.2	-	-	-	-	-	14.07	14.07	19.25	14.07	14.07	3.95	-	-	-	-
128-128.750	-	3225.0	762.0	57.2	-	-	-	-	-	14.25	14.25	19.50	14.25	14.25	4.00	-	-	-	-
130-130.750	-	3275.0	762.0	57.2	-	-	-	-	-	14.43	14.43	19.75	14.43	14.43	4.05	-	-	-	-
132-132.750	-	3325.0	762.0	57.2	-	-	-	-	-	14.61	14.61	20.00	14.61	14.61	4.10	-	-	-	-
134-134.750	-	3375.0	762.0	57.2	-	-	-	-	-	14.79	14.79	20.25	14.79	14.79	4.15	-	-	-	-
136-136.750	-	3425.0	762.0	57.2	-	-	-	-	-	14.97	14.97	20.50	14.97	14.97	4.20	-	-	-	-
138-138.750	-	3475.0	762.0	57.2	-	-	-	-	-	15.15	15.15	20.75	15.15	15.15	4.25	-	-	-	-
140-140.750	-	3525.0	762.0	57.2	-	-	-	-	-	15.33	15.33	21.00	15.33	15.33	4.30	-	-	-	-
142-142.750	-	3575.0	762.0	57.2	-	-	-	-	-	15.51	15.51	21.25	15.51	15.51	4.35	-	-	-	-
144-144.750	-	3625.0	762.0	57.2	-	-	-	-	-	15.69	15.69	21.50	15.69	15.69	4.40	-	-	-	-
146-146.750	-	3675.0	762.0	57.2	-	-	-	-	-	15.87	15.87	21.75	15.87	15.87	4.45	-	-	-	-
148-148.750	-	3725.0	762.0	57.2	-	-	-	-	-	16.05	1								



沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

技术参数 Technical parameter

三通
规格 重量



Seamless
Straight and Reducing Outlet Tees
ASME/ANSI B16.9

三通
规格 重量



Seamless
Straight and Reducing Outlet Tees
ASME/ANSI B16.9

Nominal Pipe Size (NPS) 公称通径 英寸	Dimensions				Wall Thickness-Approx Weight 壁 厚														
	Outside Diameter at NPS D/D ₁ 外径				Sch. 20		Sch. 30		STD			Sch. 40			Sch. 60				
	D	D ₁	C	M	t	kg	t	kg	t	kg	t	kg	t	kg	t	kg	t	kg	
	mm	mm	mm	mm	mm		mm		mm		mm		mm		mm		mm		
1 1/2 - 1 1/2	48.3	48.3	88.2	87.2	-	-	-	-	2.77	2.77	9.74	2.77	2.77	9.74	-	-	-	-	
2 - 2 1/2	56.3	56.3	95.2	94.2	-	-	-	-	3.31	3.31	11.55	3.31	3.31	11.55	-	-	-	-	
3 - 3	-	63.5	101.6	100.6	-	-	-	-	3.75	3.75	13.29	3.75	3.75	13.29	-	-	-	-	
4 - 4	-	76.2	114.3	113.3	-	-	-	-	4.31	4.31	15.43	4.31	4.31	15.43	-	-	-	-	
5 - 5	-	88.9	127.0	126.0	-	-	-	-	4.85	4.85	17.57	4.85	4.85	17.57	-	-	-	-	
6 - 6	-	101.6	139.7	138.7	-	-	-	-	5.39	5.39	19.71	5.39	5.39	19.71	-	-	-	-	
8 - 8	127.0	127.0	165.1	164.1	-	-	-	-	6.45	6.45	23.67	6.45	6.45	23.67	-	-	-	-	
10 - 10	152.4	152.4	190.5	189.5	-	-	-	-	7.51	7.51	27.63	7.51	7.51	27.63	-	-	-	-	
12 - 12	177.8	177.8	215.9	214.9	-	-	-	-	8.57	8.57	31.59	8.57	8.57	31.59	-	-	-	-	
14 - 14	203.2	203.2	241.3	240.3	-	-	-	-	9.63	9.63	35.55	9.63	9.63	35.55	-	-	-	-	
16 - 16	228.6	228.6	266.7	265.7	-	-	-	-	10.69	10.69	39.51	10.69	10.69	39.51	-	-	-	-	
18 - 18	254.0	254.0	292.1	291.1	-	-	-	-	11.75	11.75	43.47	11.75	11.75	43.47	-	-	-	-	
20 - 20	279.4	279.4	317.5	316.5	-	-	-	-	12.81	12.81	47.43	12.81	12.81	47.43	-	-	-	-	
22 - 22	304.8	304.8	342.9	341.9	-	-	-	-	13.87	13.87	51.39	13.87	13.87	51.39	-	-	-	-	
24 - 24	330.2	330.2	368.3	367.3	-	-	-	-	14.93	14.93	55.35	14.93	14.93	55.35	-	-	-	-	
26 - 26	355.6	355.6	393.7	392.7	-	-	-	-	15.99	15.99	59.31	15.99	15.99	59.31	-	-	-	-	
28 - 28	381.0	381.0	419.1	418.1	-	-	-	-	17.05	17.05	63.27	17.05	17.05	63.27	-	-	-	-	
30 - 30	406.4	406.4	444.5	443.5	-	-	-	-	18.11	18.11	67.23	18.11	18.11	67.23	-	-	-	-	
32 - 32	431.8	431.8	469.9	468.9	-	-	-	-	19.17	19.17	71.19	19.17	19.17	71.19	-	-	-	-	
34 - 34	457.2	457.2	495.3	494.3	-	-	-	-	20.23	20.23	75.15	20.23	20.23	75.15	-	-	-	-	
36 - 36	482.6	482.6	520.7	519.7	-	-	-	-	21.29	21.29	79.11	21.29	21.29	79.11	-	-	-	-	
38 - 38	508.0	508.0	546.1	545.1	-	-	-	-	22.35	22.35	83.07	22.35	22.35	83.07	-	-	-	-	
40 - 40	533.4	533.4	571.5	570.5	-	-	-	-	23.41	23.41	87.03	23.41	23.41	87.03	-	-	-	-	
42 - 42	558.8	558.8	596.9	595.9	-	-	-	-	24.47	24.47	90.99	24.47	24.47	90.99	-	-	-	-	
44 - 44	584.2	584.2	622.3	621.3	-	-	-	-	25.53	25.53	94.95	25.53	25.53	94.95	-	-	-	-	
46 - 46	609.6	609.6	647.7	646.7	-	-	-	-	26.59	26.59	98.91	26.59	26.59	98.91	-	-	-	-	
48 - 48	635.0	635.0	673.1	672.1	-	-	-	-	27.65	27.65	102.87	27.65	27.65	102.87	-	-	-	-	
50 - 50	660.4	660.4	698.5	697.5	-	-	-	-	28.71	28.71	106.83	28.71	28.71	106.83	-	-	-	-	
52 - 52	685.8	685.8	723.9	722.9	-	-	-	-	29.77	29.77	110.79	29.77	29.77	110.79	-	-	-	-	
54 - 54	711.2	711.2	749.3	748.3	-	-	-	-	30.83	30.83	114.75	30.83	30.83	114.75	-	-	-	-	
56 - 56	736.6	736.6	774.7	773.7	-	-	-	-	31.89	31.89	118.71	31.89	31.89	118.71	-	-	-	-	
58 - 58	762.0	762.0	800.1	799.1	-	-	-	-	32.95	32.95	122.67	32.95	32.95	122.67	-	-	-	-	
60 - 60	787.4	787.4	825.5	824.5	-	-	-	-	34.01	34.01	126.63	34.01	34.01	126.63	-	-	-	-	
62 - 62	812.8	812.8	850.9	849.9	-	-	-	-	35.07	35.07	130.59	35.07	35.07	130.59	-	-	-	-	
64 - 64	838.2	838.2	876.3	875.3	-	-	-	-	36.13	36.13	134.55	36.13	36.13	134.55	-	-	-	-	
66 - 66	863.6	863.6	901.7	900.7	-	-	-	-	37.19	37.19	138.51	37.19	37.19	138.51	-	-	-	-	
68 - 68	889.0	889.0	927.1	926.1	-	-	-	-	38.25	38.25	142.47	38.25	38.25	142.47	-	-	-	-	
70 - 70	914.4	914.4	952.5	951.5	-	-	-	-	39.31	39.31	146.43	39.31	39.31	146.43	-	-	-	-	
72 - 72	939.8	939.8	977.9	976.9	-	-	-	-	40.37	40.37	150.39	40.37	40.37	150.39	-	-	-	-	
74 - 74	965.2	965.2	1003.3	1002.3	-	-	-	-	41.43	41.43	154.35	41.43	41.43	154.35	-	-	-	-	
76 - 76	990.6	990.6	1028.7	1027.7	-	-	-	-	42.49	42.49	158.31	42.49	42.49	158.31	-	-	-	-	
78 - 78	1016.0	1016.0	1054.1	1053.1	-	-	-	-	43.55	43.55	162.27	43.55	43.55	162.27	-	-	-	-	
80 - 80	1041.4	1041.4	1079.5	1078.5	-	-	-	-	44.61	44.61	166.23	44.61	44.61	166.23	-	-	-	-	
82 - 82	1066.8	1066.8	1104.9	1103.9	-	-	-	-	45.67	45.67	170.19	45.67	45.67	170.19	-	-	-	-	
84 - 84	1092.2	1092.2	1130.3	1129.3	-	-	-	-	46.73	46.73	174.15	46.73	46.73	174.15	-	-	-	-	
86 - 86	1117.6	1117.6	1155.7	1154.7	-	-	-	-	47.79	47.79	178.11	47.79	47.79	178.11	-	-	-	-	
88 - 88	1143.0	1143.0	1181.1	1180.1	-	-	-	-	48.85	48.85	182.07	48.85	48.85	182.07	-	-	-	-	
90 - 90	1168.4	1168.4	1206.5	1205.5	-	-	-	-	49.91	49.91	186.03	49.91	49.91	186.03	-	-	-	-	
92 - 92	1193.8	1193.8	1231.9	1230.9	-	-	-	-	50.97	50.97	190.00	50.97	50.97	190.00	-	-	-	-	
94 - 94	1219.2	1219.2	1257.3	1256.3	-	-	-	-	52.03	52.03	193.96	52.03	52.03	193.96	-	-	-	-	
96 - 96	1244.6	1244.6	1282.7	1281.7	-	-	-	-	53.09	53.09	197.92	53.09	53.09	197.92	-	-	-	-	
98 - 98	1270.0	1270.0	1308.1	1307.1	-	-	-	-	54.15	54.15	201.88	54.15	54.15	201.88	-	-	-	-	
100 - 100	1295.4	1295.4	1333.5	1332.5	-	-	-	-	55.21	55.21	205.84	55.21	55.21	205.84	-	-	-	-	


Nominal Pipe Size (NPS) 公称通径 英寸	Wall Thickness-Approx Weight 壁 厚																	
	XS			Sch. 20			Sch. 30			Sch. 40			Sch. 60			K50		
	t mm	L mm	Kg	t mm	L mm	Kg	t mm	L mm	Kg	t mm	L mm	Kg	t mm	L mm	Kg	t mm	L mm	Kg
	英寸	英寸	磅	英寸	英寸	磅	英寸	英寸	磅	英寸	英寸	磅	英寸	英寸	磅	英寸	英寸	磅
1.5-1.5	0.08	5.08	189	5.08	5.08	189	-	-	-	-	-	-	7.14	7.14	154	10.15	10.15	132
2-2.5	0.04	3.91	185	5.54	3.91	185	-	-	-	-	-	-	8.74	5.96	273	11.07	7.80	344
2	-	4.58	185	-	4.58	185	-	-	-	-	-	-	-	6.35	275	-	6.35	344
2.5	-	4.88	185	-	4.88	185	-	-	-	-	-	-	-	6.35	275	-	9.75	344
3	-	5.08	185	-	5.08	185	-	-	-	-	-	-	-	7.14	275	-	10.15	344
3.5	-	5.54	185	-	5.54	185	-	-	-	-	-	-	-	8.74	275	-	11.07	344
2.5-3.5	7.92	4.98	254	7.92	4.98	254	-	-	-	-	-	-	8.62	6.35	288	14.02	9.75	248
3.5	-	4.98	254	-	4.98	254	-	-	-	-	-	-	-	6.35	288	-	9.75	248
4	-	5.08	254	-	5.08	254	-	-	-	-	-	-	-	7.14	288	-	10.15	248
4.5	-	5.54	254	-	5.54	254	-	-	-	-	-	-	-	8.74	288	-	11.07	248
5	-	7.92	254	-	7.92	254	-	-	-	-	-	-	-	9.53	288	-	14.02	248
5.5	-	7.92	254	-	7.92	254	-	-	-	-	-	-	-	11.83	288	-	14.02	248
6-6.5	7.92	4.98	369	7.92	4.98	369	-	-	-	-	-	-	11.83	6.35	408	18.24	9.75	836
6.5	-	5.08	369	-	5.08	369	-	-	-	-	-	-	-	7.14	408	-	10.15	836
7	-	5.54	369	-	5.54	369	-	-	-	-	-	-	-	8.74	408	-	11.07	836
7.5	-	7.92	369	-	7.92	369	-	-	-	-	-	-	-	9.53	408	-	14.02	836
8	-	7.92	369	-	7.92	369	-	-	-	-	-	-	-	11.83	408	-	14.02	836
4-11.5	8.25	5.08	636	8.25	5.08	636	-	-	-	-	-	-	8.64	7.14	625	17.12	11.05	1247
5	-	5.54	636	-	5.54	636	-	-	-	-	-	-	-	8.74	625	-	11.05	1247
5.5	-	7.92	636	-	7.92	636	-	-	-	-	-	-	-	9.53	625	-	14.02	1247
6	-	8.96	636	-	8.96	636	-	-	-	-	-	-	-	11.83	625	-	15.24	1247
6.5	-	8.96	636	-	8.96	636	-	-	-	-	-	-	-	13.48	625	-	17.12	1247
7-7.5	8.53	5.54	1181	8.53	5.54	1181	-	-	-	-	-	-	8.62	8.74	1025	19.05	11.05	2536
7.5	-	7.92	1181	-	7.92	1181	-	-	-	-	-	-	-	9.53	1025	-	14.02	2536
8	-	7.92	1181	-	7.92	1181	-	-	-	-	-	-	-	11.83	1025	-	15.24	2536
8.5	-	8.96	1181	-	8.96	1181	-	-	-	-	-	-	-	13.48	1025	-	17.12	2536
9	-	8.96	1181	-	8.96	1181	-	-	-	-	-	-	-	15.88	1025	-	19.05	2536
6-12.5	19.97	7.92	1010	19.97	7.92	1010	-	-	-	-	-	-	8.25	9.53	2025	21.85	14.02	2583
7	-	7.92	1010	-	7.92	1010	-	-	-	-	-	-	-	11.83	2025	-	15.24	2583
7.5	-	8.96	1010	-	8.96	1010	-	-	-	-	-	-	-	13.48	2025	-	17.12	2583
8	-	9.53	1010	-	9.53	1010	-	-	-	-	-	-	-	15.88	2025	-	19.05	2583
8.5	-	10.97	1010	-	10.97	1010	-	-	-	-	-	-	-	18.24	2025	-	21.85	2583
9-14	12.70	8.96	2094	12.70	8.96	2094	-	-	-	-	-	-	18.25	11.13	3588	-	-	-
9	-	8.96	2094	-	8.96	2094	-	-	-	-	-	-	-	12.70	3588	-	-	-
9.5	-	10.97	2094	-	10.97	2094	-	-	-	-	-	-	-	14.27	3588	-	-	-
10	-	12.70	2094	-	12.70	2094	-	-	-	-	-	-	-	16.25	3588	-	-	-
10.5	-	12.70	2094	-	12.70	2094	-	-	-	-	-	-	-	18.25	3588	-	-	-
11	-	14.27	2094	-	14.27	2094	-	-	-	-	-	-	-	20.25	3588	-	-	-
11.5	-	16.25	2094	-	16.25	2094	-	-	-	-	-	-	-	22.25	3588	-	-	-
12	-	18.25	2094	-	18.25	2094	-	-	-	-	-	-	-	24.25	3588	-	-	-
12.5	-	20.25	2094	-	20.25	2094	-	-	-	-	-	-	-	26.25	3588	-	-	-
13	-	22.25	2094	-	22.25	2094	-	-	-	-	-	-	-	28.25	3588	-	-	-
13.5	-	24.25	2094	-	24.25	2094	-	-	-	-	-	-	-	30.25	3588	-	-	-
14	-	26.25	2094	-	26.25	2094	-	-	-	-	-	-	-	32.25	3588	-	-	-
14.5	-	28.25	2094	-	28.25	2094	-	-	-	-	-	-	-	34.25	3588	-	-	-
15	-	30.25	2094	-	30.25	2094	-	-	-	-	-	-	-	36.25	3588	-	-	-
15.5	-	32.25	2094	-	32.25	2094	-	-	-	-	-	-	-	38.25	3588	-	-	-
16	-	34.25	2094	-	34.25	2094	-	-	-	-	-	-	-	40.25	3588	-	-	-
16.5	-	36.25	2094	-	36.25	2094	-	-	-	-	-	-	-	42.25	3588	-	-	-
17	-	38.25	2094	-	38.25	2094	-	-	-	-	-	-	-	44.25	3588	-	-	-
17.5	-	40.25	2094	-	40.25	2094	-	-	-	-	-	-	-	46.25	3588	-	-	-
18	-	42.25	2094	-	42.25	2094	-	-	-	-	-	-	-	48.25	3588	-	-	-
18.5	-	44.25	2094	-	44.25	2094	-	-	-	-	-	-	-	50.25	3588	-	-	-
19	-	46.25	2094	-	46.25	2094	-	-	-	-	-	-	-	52.25	3588	-	-	-
19.5	-	48.25	2094	-	48.25	2094	-	-	-	-	-	-	-	54.25	3588	-	-	-
20	-	50.25	2094	-	50.25	2094	-	-	-	-	-	-	-	56.25	3588	-	-	-
20.5	-	52.25	2094	-	52.25	2094	-	-	-	-	-	-	-	58.25	3588	-	-	-
21	-	54.25	2094	-	54.25	2094	-	-	-	-	-	-	-	60.25	3588	-	-	-
21.5	-	56.25	2094	-	56.25	2094	-	-	-	-	-	-	-	62.25	3588	-	-	-
22	-	58.25	2094	-	58.25	2094	-	-	-	-	-	-	-	64.25	3588	-	-	-
22.5	-	60.25	2094	-	60.25	2094	-	-	-	-	-	-	-	66.25	3588	-	-	-
23	-	62.25	2094	-	62.25	2094	-	-	-	-	-	-	-	68.25	3588	-	-	-
23.5	-	64.25	2094	-	64.25	2094	-	-	-	-	-	-	-	70.25	3588	-	-	-
24	-	66.25	2094	-	66.25	2094	-	-	-	-	-	-	-	72.25	3588	-	-	-
24.5	-	68.25	2094	-	68.25	2094	-	-	-	-	-	-	-	74.25	3588	-	-	-
25	-	70.25	2094	-	70.25	2094	-	-	-	-	-	-	-	76.25	3588	-	-	-
25.5	-	72.25	2094	-	72.25	2094	-	-	-	-	-	-	-	78.25	3588	-	-	-
26	-	74.25	2094	-	74.25	2094	-	-	-	-	-	-	-	80.25	3588	-	-	-
26.5	-	76.25	2094	-	76.25	2094	-	-	-	-	-	-	-	82.25	3588	-	-	-
27	-	78.25	2094	-	78.25	2094	-	-	-	-	-	-	-	84.25	3588	-	-	-
27.5	-	80.25	2094	-	80.25	2094	-	-	-	-	-	-	-	86.25	3588	-	-	-
28	-	82.25	2094	-	82.25	2094	-	-	-	-	-	-	-	88.25	3588	-	-	-
28.5	-	84.25	2094	-	84.25	2094	-	-	-	-	-	-	-	90.25	3588	-	-	-
29	-	86.25	2094	-	86.25	2094	-	-	-	-	-	-	-	92.25	3588	-	-	-
29.5	-	88.25	2094	-	88.25	2094	-	-	-	-	-	-	-	94.25	3588	-	-	-
30	-	90.25	2094	-	90.25	2094	-	-	-	-	-	-	-	96.25	3588	-	-	-
30.5	-	92.25	2094	-	92.25	2094	-	-	-	-	-	-	-	98.25	3588	-	-	-
31	-	94.25	2094	-	94.25	2094	-	-	-	-	-	-	-	100.25	3588	-	-	-
31.5	-	96.25	2094	-	96.25	2094	-	-	-	-	-	-	-	102.25	3588	-	-	-
32	-	98.25	2094	-	98.25	2094	-	-	-	-	-	-	-	104.25	3588	-	-	-
32.5	-	100.25	2094	-	100.25	2094	-	-	-	-	-	-	-	106.25	3588	-	-	-
33	-	102.25	2094	-	102.25	2094	-	-	-	-	-	-	-	108.25	3588	-	-	-
33.5	-	104.25	2094	-	104.25	2094	-	-	-	-	-	-	-	110.25	3588	-	-	-
34	-	106.25	2094	-	106.25	2094	-	-	-	-	-	-	-	112.25	3588	-	-	-
34.5	-	108.25	2094	-	108.25	2094	-	-	-	-	-	-	-	114.25	3588	-	-	-
35	-	110.25	2094	-	110.25	2094	-	-	-	-	-	-	-	116.25	3588	-	-	-
35.5	-	112.25	2094	-	112.25	2094	-	-	-	-	-	-	-	118.25	3588	-	-	-
36	-	114.25	2094	-	114.25	2094	-	-	-	-	-	-	-	120.25	3588	-	-	-
36.5	-	116.25	2094	-	116.25	2094	-	-	-	-	-	-	-	122.25	3588	-	-	-
37	-	118.25	2094	-	118.25	2094	-	-	-	-	-	-	-	124.25	3588	-	-	-
37.5	-	120.25	2094	-	120.25	2094	-	-	-	-	-	-	-	126.25	3588	-		



沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

技术参数 Technical parameter

三通
规格 重量




Seamless
Straight and Reducing Outlet Tees
ASME/ANSI B16.9

Nominal Pipe Size (NPS) 公称通径 英寸	Dimensions			Wall Thickness-Approx. Weight 壁 厚															
	Outside Diameter at Level D.O. H			Center to End															
	D			Sch.30															
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t

Nominal Pipe Size (NPS) 公称通径 英寸	Wall Thickness-Approx. Weight 壁 厚																	
	XS																	
	Sch.80																	
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t

异径管
规格 重量



Seamless Reducers
ASME/ANSI B16.9

Nominal Pipe Size (NPS) 公称通径 英寸	Dimensions			Wall Thickness-Approx. Weight 壁 厚															
	Outside Diameter at Level D.O. H			End to End															
	D			Sch.20															
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t


异径管
规格 重量



Seamless Reducers
ASME/ANSI B16.9

Nominal Pipe Size (NPS) 公称通径 英寸	Dimensions			Wall Thickness-Approx. Weight 壁 厚															
	Outside Diameter at Level D.O. H			End to End															
	D			Sch.20															
	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t	t

异径管
规格 重量



Seamless Reducers
ASME/ANSI B16.9

[illegible]

管 帽	
規格	重量



Capa
ASME ANSI B16.9
MSS SP-43

Part No. 分件號碼 料號	Dimension 1					Wall Thickness 壁 厚				Approx. weight 重 量 kg
	Outside Diameter at Bevel D 外徑		Length E 高度 E mm	Hole 開 孔 mm	Height E mm	Sch. No.	t			
	Inch 英寸	mm					Inch 英寸	mm		
1/2	08.10	21.34	23.4	4.87	28.4	50	0.053	1.35	0.038	
						100	0.053	2.11	0.032	
						STD-1/8 4.80	0.029	2.13	0.068	
						X5-80 000	0.147	2.13	0.058	
						160	0.058	1.70		
3/8	10.50	26.62	25.4	3.81	25.4	50	0.053	1.35	0.040	
						100	0.053	2.11	0.050	
						STD-1/8 4.80	0.032	3.16	0.050	
						X5-80 000	0.054	3.81	0.070	
						160	0.219	3.16		
1	13.15	33.40	30.1	4.87	30.1	50	0.053	1.35	0.050	
						100	0.029	2.77	0.050	
						STD-1/8 4.80	0.032	3.38	0.108	
						X5-80 000	0.079	4.83	0.100	
						160	0.258	6.35		
1 1/8	18.60	42.20	38.1	4.83	38.1	50	0.053	1.35	0.050	
						100	0.101	2.77	0.108	
						STD-1/8 4.80	0.140	3.38	0.140	
						X5-80 000	0.101	4.83	0.200	
						160	0.260	6.35		
1 1/2	19.00	48.30	38.1	5.08	38.1	50	0.066	1.65	0.075	
						100	0.186	2.77	0.140	
						STD-1/8 4.80	0.148	3.68	0.170	
						X5-80 000	0.280	3.06	0.240	
						160	0.251	7.14	0.260	
2	23.18	68.30	38.1	5.58	41.5	50	0.085	1.65	0.090	
						100	0.186	2.77	0.190	
						STD-1/8 4.80	0.194	3.81	0.240	
						X5-80 000	0.216	5.84	0.320	
						160	0.384	5.74	0.340	
2 1/2	28.10	73.60	38.1	7.11	68.8	50	0.053	2.11	0.160	
						100	0.028	3.05	0.240	
						STD-1/8 4.80	0.203	5.16	0.420	
						X5-80 000	0.278	3.18	0.670	
						160	0.378	9.53	0.770	
3	35.00	98.80	50.8	7.62	63.5	50	0.053	14.02	1.130	
						100	0.053	2.11	0.260	
						STD-1/8 4.80	0.028	3.05	0.680	
						X5-80 000	0.216	5.19	0.870	
						160	0.338	7.62	0.820	
4	48.00	114.30	63.5	8.64	76.2	50	0.053	2.11	0.480	
						100	0.028	3.05	0.680	
						STD-1/8 4.80	0.237	6.02	1.170	
						X5-80 000	0.397	6.56	1.680	
						160	0.438	18.13	1.680	
5	55.60	141.30	76.2	9.68	88.9	50	0.053	2.11	0.480	
						100	0.028	3.05	0.680	
						STD-1/8 4.80	0.237	6.02	1.170	
						X5-80 000	0.397	6.56	1.680	
						160	0.438	18.13	1.680	
6	63.00	168.30	88.9	10.30	101.5	50	0.053	2.11	0.480	
						100	0.028	3.05	0.680	
						STD-1/8 4.80	0.237	6.02	1.170	
						X5-80 000	0.397	6.56	1.680	
						160	0.438	18.13	1.680	



沧州亚海金通管业有限公司
Cangzhou YaHaiJinTong Pipe Industries Co., Ltd

技术参数 Technical parameter

管帽
规格 重量



Caps
ASME/ANSI B16.9
MSS SP-43

Nominal Pipe Size 公称通径 NPS 英寸	Dimensions				Wall Thickness			Approx Weight 重量 kg	
	Outside Diameter 外径		Length 长度 mm	Weight 重量 mm	SCH 40	t			
	inch 英寸	mm				inch 英寸	mm		
	6	6.625	249.3	101.6	12.7	827.0	5S 10S STD X 5S 20 30 40 60 80 100 120 140 160 X 5S		6.109 6.148 6.302 6.500 6.250 6.405 6.594 6.719 6.812 6.905 6.975
10	10.75	273	127.0	12.7	882.4	5S 10S STD X 5S 20 30 40 60 80 100 120 140 160	6.134 6.165 6.300 6.365 6.594 6.250 6.405 6.595 6.719 6.844 6.940 7.125	2.404 4.191 12.70 9.271 15.09 6.35 16.20 21.44 25.40 20.40	3.25 4.30 16.40 8.82 12.29
12	12.750	323.3	152.4	12.7	117.3	5S 10S STD X 5S 20 40 60 80 100 120 140 160	6.155 6.185 6.315 6.500 6.250 6.405 6.595 6.719 6.844 6.940 7.125 7.312	3.95 4.612 9.53 12.70 6.35 10.38 14.27 17.48 21.44 24.68 25.32	5.47 6.80 13.19 17.49 6.35 14.69 26.40 28.99
14	14.880	355.6	152.4	12.7	190.5	5S 10S STD X 5S 20 40 60 80 100 120 140 160	6.155 6.185 6.315 6.500 6.250 6.405 6.594 6.719 6.838 6.940 7.125 7.312	3.95 4.76 9.53 7.92 11.13 12.70 15.09 19.08 22.825 27.19 31.18	16.99 16.69 21.29 34.99
16	16.880	406.4	177.8	12.7	353.2	5S 10S STD X 5S 20 40 60 80 100 120 140 160	6.155 6.185 6.315 6.500 6.212 6.355 6.544 6.731 6.924 7.119 7.312 7.504	4.59 4.76 9.53 12.70 7.92 10.69 21.44 26.19 29.36 34.93 39.67	49.89
18	18.880	457.6	203.2	12.7	328.6	5S 10S STD X 5S 20 40 60 80 100 120 140 160	6.155 6.185 6.315 6.500 6.212 6.362 6.550 6.735 6.926 7.119 7.312 7.504	4.59 4.76 9.53 12.70 7.92 14.27 19.09 23.83 29.36 34.93 39.67 45.24	56.69 34.19

管帽
规格 重量



Caps
ASME/ANSI B16.9
MSS SP-43

Nominal Pipe Size 公称通径 NPS 英寸	Dimensions 尺寸					Wall Thickness 壁厚			Approx Weight 重量 kg
	Outside Diameter 外径		Length 长度	Weight 重量	Modulus 弹性模量	Sch. 40	t		
	inch 英寸	mm					inch 英寸	mm	
20	20.800	508.0	225.0	12.7	234.0	5S	6.168	4.21	31.80 42.80 54.80 93.70
						10S	6.219	5.51	
						STD	6.319	9.53	
						X5	6.588	12.70	
						60	6.894	15.09	
						80	6.812	20.62	
						90	6.831	26.69	
						100	6.981	32.54	
						120	6.999	38.80	
						140	6.758	44.80	
160	6.969	50.81							
22	22.800	588.0	254.0	12.7	254.0	5S	6.168	4.21	36.08 51.78 115.68
						10S	6.219	5.51	
						STD	6.319	9.53	
						X5	6.588	12.70	
						60	6.875	22.23	
						80	6.125	28.59	
						100	6.375	34.93	
						120	6.625	41.28	
						140	6.875	47.63	
						160	6.125	53.98	
24	24.800	668.0	266.7	12.7	304.8	5S	6.219	5.51	45.10 60.10 90.80 168.00
						10S	6.269	6.21	
						STD	6.375	9.53	
						X5	6.588	12.70	
						60	6.888	17.83	
						80	6.569	24.54	
						90	6.219	30.30	
						100	6.431	36.80	
						120	6.612	40.02	
						140	6.862	52.37	
160	6.344	59.54							
26	26.800	690.0	266.7	-	-	STD	6.375	9.53	90.30
					X5	6.588	12.70	101.30	
28	28.800	730.0	266.7	-	-	STD	6.375	9.53	96.30
					X5	6.588	12.70	114.90	
30	30.800	780.0	266.7	=	=	5S	6.269	6.26	102.10 120.80
					10S	6.312	7.92		
					STD	6.375	9.53		
					X5	6.588	12.70		
32	32.800	830.0	266.7	-	-	STD	6.375	9.53	109.40
					60	6.888	17.83	126.00	
					90	6.588	12.1	121.20	
34	34.800	880.0	266.7	=	=	STD	6.375	9.53	116.80
					X5	6.588	12.70	138.00	
					60	6.888	17.83	139.00	
36	36.800	930.0	266.7	-	-	STD	6.375	9.53	121.80
					X5	6.588	12.70	149.00	
					60	6.758	19.05	154.00	
38	38.800	980.2	384.0	-	-	STD	6.375	9.53	147.0
					90	6.588	12.70	156.00	
40	40.800	1030.0	384.0	=	=	STD	6.375	9.53	162.00
					X5	6.588	12.70	187.00	
42	42.800	1080.0	384.0	-	-	STD	6.375	9.53	164.00
					X5	6.588	12.70	187.00	
44	44.800	1130.0	342.9	=	=	STD	6.375	9.53	159.00
					X5	6.588	12.70	182.00	
46	46.800	1180.4	342.9	-	-	STD	6.375	9.53	154.00
					X5	6.588	12.70	178.00	
48	48.800	1230.2	342.9	-	-	STD	6.375	9.53	147.00
					X5	6.588	12.70	181.00	